


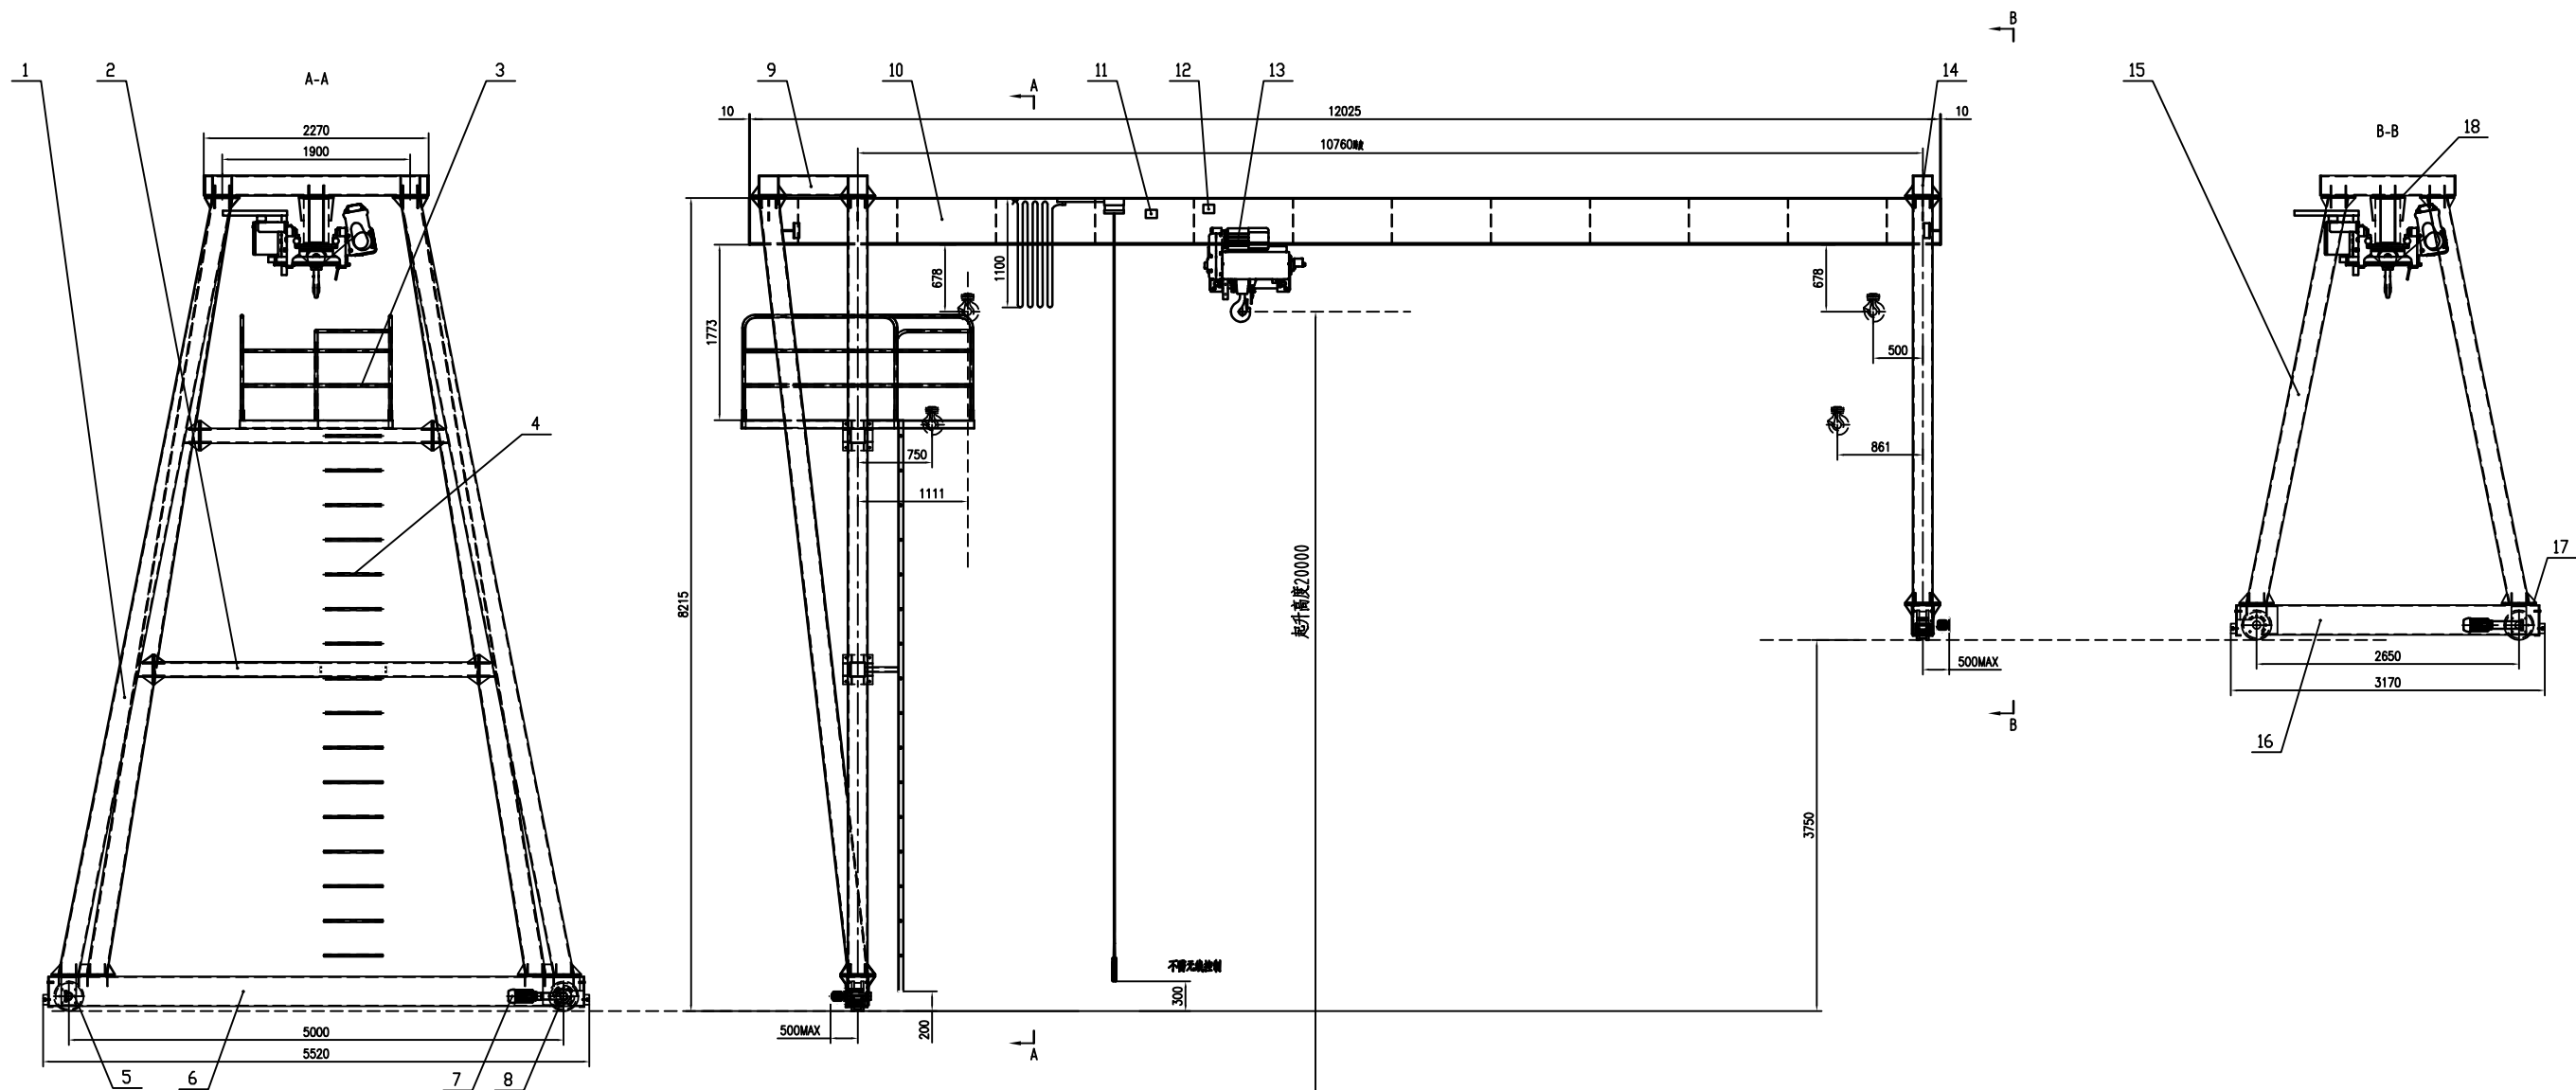

起重机移动距离为35.6m,移动时需供电
移动设置:
纵向移动:快/慢
横向移动:快/慢

性能参数表

型号	MH型	葫芦	华德
起重量	3000kg	起升功率	5.0/0.7kw
跨度	10.76m	小车功率	0.75kw
高度	8.2m	葫芦运行速度	5-20m/min
起升高度	20m	大车运行速度	10-40m/min
起升速度	8/13m/min	电压	415V 50HZ
钢材	Q235B	工作级别	A5
铭牌			
电机: 威宁三六变频三合一电机(IP55)0.75kw			
主要电器元件: 浙江正泰或施耐德			
保护装置: 紧急关闭开关, 过载保护, 接地保护, 运行保护, 起升保护, 防风夹			

18		螺栓M24×100	12				
17		螺栓M16×80	72				
16	MH-10	下横梁2	1	物件	201.2	201.2	
15	MH-9	短支腿站	1	物件	363.6	363.6	
14	MH-8	上横梁2	1	物件	94.9	94.9	
13	华德	3t-20m电动葫芦	1	成品			
12		电位器装置	1	物件	1	1	
11		端梁装置	1	物件	1	1	
10	MH-7	主梁	1	物件	1159.1	1159.1	
9	MH-6	上横梁1	1	物件	303.8	303.8	
8		主梁车轴装置φ270	2	物件			
7		减速机	2	成品			
6	MH-5	下横梁1	1	物件	332	332	
5		被动车轴装置φ270	2	物件			
4	MH-4	爬梯	1	物件	51.6	51.6	
3	MH-3	操作平台	1	物件	160.15	160.15	
2	MH-2	原轴站	1	物件	26.4	26.4	
1	MH-1	长支腿站	1	物件	1276.2	1276.2	
序号	代 号	名 称	数 量	材 料	单 件 重 量	总 重 量	备 注